Max TECHNOLOGY

NUMAX TECHNOLOGY (P) LTD.
(An ISO 9001:2008 Company)



Max-Bio400i

Fingerprint Time Attendance & Access Control Terminal

Bio400i is a 3-inch TFT screen Attendance and Access Control Terminal. Adopting the new user-friendly firmware and latest coreboard improves performance, accelerates identification, speed and has more expandability for various customization requirements. What's more the user-friendly interface brings you a new user experience. With built-in 2000mAh backup battery, it can eliminate the trouble of power failure.

RS232/485, TCP/IP, USB-host and optional Wi-Fi and GPRS ensure a smooth data transmission between device and PC. Bio400i has an access control interface for weigand-in, weigand-out, door lock, alarm, and bell.

Features

- Intuitive and stunning UI
- Interface operation adopts modularized hierarchial design
- Simpler, better, and more logical
- Great user interactivity
- Multi-languages
- Data backup and retrieve
- Advanced user ID consisted of letters and numbers
- Chip encryption for firmware protection
- Easy to extend functions and customize customer's requirements.

www.maxtechnology.org
www.numaxindia.com

MAX TECHNOLOGY
&
NUMAX TECHNOLOGY (P) LTD.
405, Sai Plaza, 187-188 Sant Nagar, East of Kailash, New Delhi-110065.
Ph, : +91-11-4132 6964, 4162 6278, 26426278.
E-mail : sales@maxtechnology.org; sales @numaxindia.com


Authorised Dealer

Due to Continuous Product Development, The Design & Specification are Subject to Change without Prior Notice
All Logo's & Trademarks are the property of their respective Owners. Max Technology is the registered trademark of M/s. Numax Technology (P) Ltd.


Specifications

Fingerprint Capacity	3,000/10,000
ID Card Capacity	10,000 (Optional)
Record Capacity	100,000
Display	3.0-inch TFT screen
Communication	TCP/IP, RS232/485, USB (host and client)
Standard Functions	Workcode, SMS, DST, Self-Service Query, Automatic Status Switch, Built-in Battery, Multiple Verification Mode, ADMS
Access Control Interface for	3rd Party Electric lock, Door Sensor, Exit Button, Alarm, Door Bell
Wiegand Signal	Input & Output
Optional Functions	ID/Mifare/HID, GPRS, Wi-Fi, Webserver, Photo-ID, External Printer, External Bell, Scheduled-Bell, Anti-Passback
Power Supply	12V DC 3A
Operating Temperature	0°C - 45°C
Operating Humidity	20% - 80%
Dimension	211.54× 1589.4 × 47.8 mm (L x W x T)


Dimensions

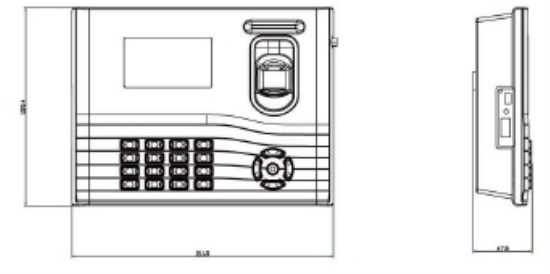


Interface

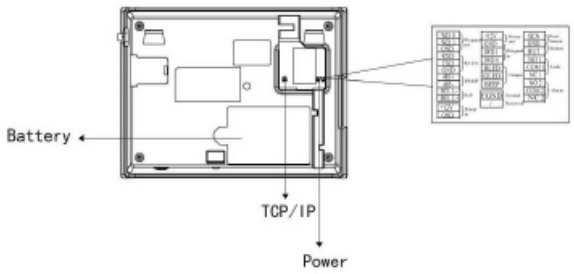


Configuration

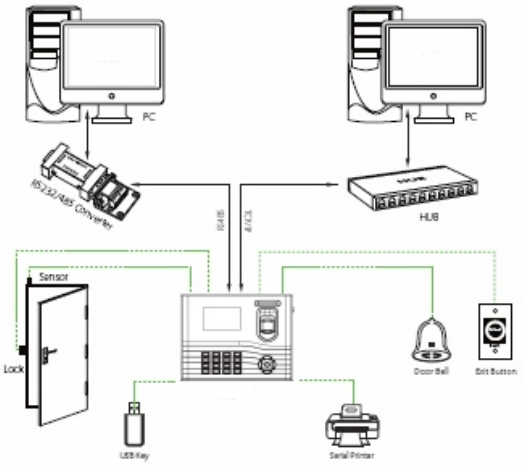


What's in the Box




Back Plate



Mounting Paper



Power Adapter





Screws and Holders



Lines for Access Control Interface



Star-shape Screw Driver

www.maxtechnology.org
www.numaxindia.com

MAX TECHNOLOGY
&
NUMAX TECHNOLOGY (P) LTD.
405, Sai Plaza, 187-188 Sant Nagar, East of Kailash, New Delhi-110065.
Ph, : +91-11-4132 6964, 4162 6278, **26426278.**
E-mail : sales@maxtechnology.org; sales @numaxindia.com

Authorised Dealer

Due to Continuous Product Development, The Design & Specification are Subject to Change without Prior Notice
All Logo's & Trademarks are the property of their respective Owners. Max Technology is the registered trademark of M/s. Numax Technology (P) Ltd.